

Product Information: Rev 1B, Issue Oct 2014, Revised Oct 2014

HF DIVIDER is indoor active divider intended for frequency range 2 - 30MHz. The active stage is built on input of passive divider. Device has input filter and protection circuit.

KEY FEATURES

- Low noise and flat gain
- Filtered and protected input
- Wide voltage range
- Green LED indicates proper supply voltage
- Low power consumption



APPLICATIONS

- Radio-monitoring
- Small signals receiving
- IF-systems

Figure 1: View of HF DIVIDER

TECHNICAL SPECIFICATIONS

Technical characteristics

Frequency range	2 - 30*	MHz
Gain (average)	13	dB
Noise figure (average)	<3.5	dB
Input VSWR (average)	2.0	
Output VSWR (average)	2.0	
P1dB at output (amplifier only)	>15	dBm
OIP3 (Δ 1MHz, amplifier only)	>30	dBm
IN/OUT impedance	50	Ohm
Current consumption	70	mA
Fuse	1.6	A
Device voltage	+12...+16	V
RF connectors	N-female	
DC connector	2.1mm jack (positive in center)	
Dimensions	See Figure 3	

* Usable up to 60MHz.

Absolute maximum ratings

Device voltage	+12...+16V	V
RF input power	+10	dBm
Operating temperature	0 to 45°C	Indoor use only

! Exceeding given parameters may permanently damage the device.

Figure 2: HF divider transfer function curve up to 150MHz


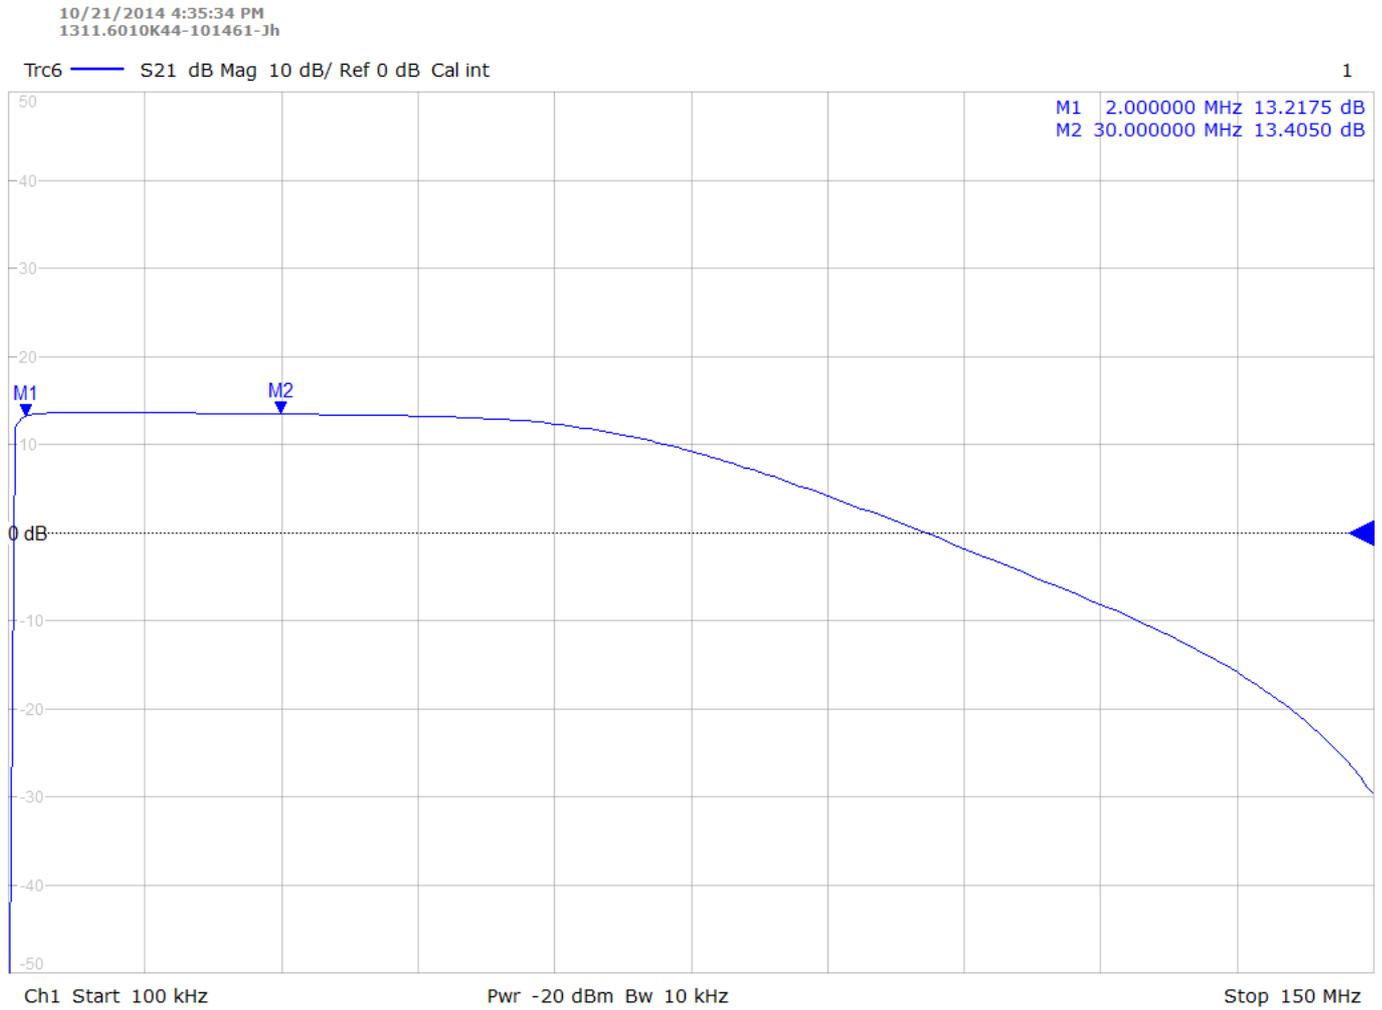


Figure 3: Mechanical dimensions (mm)

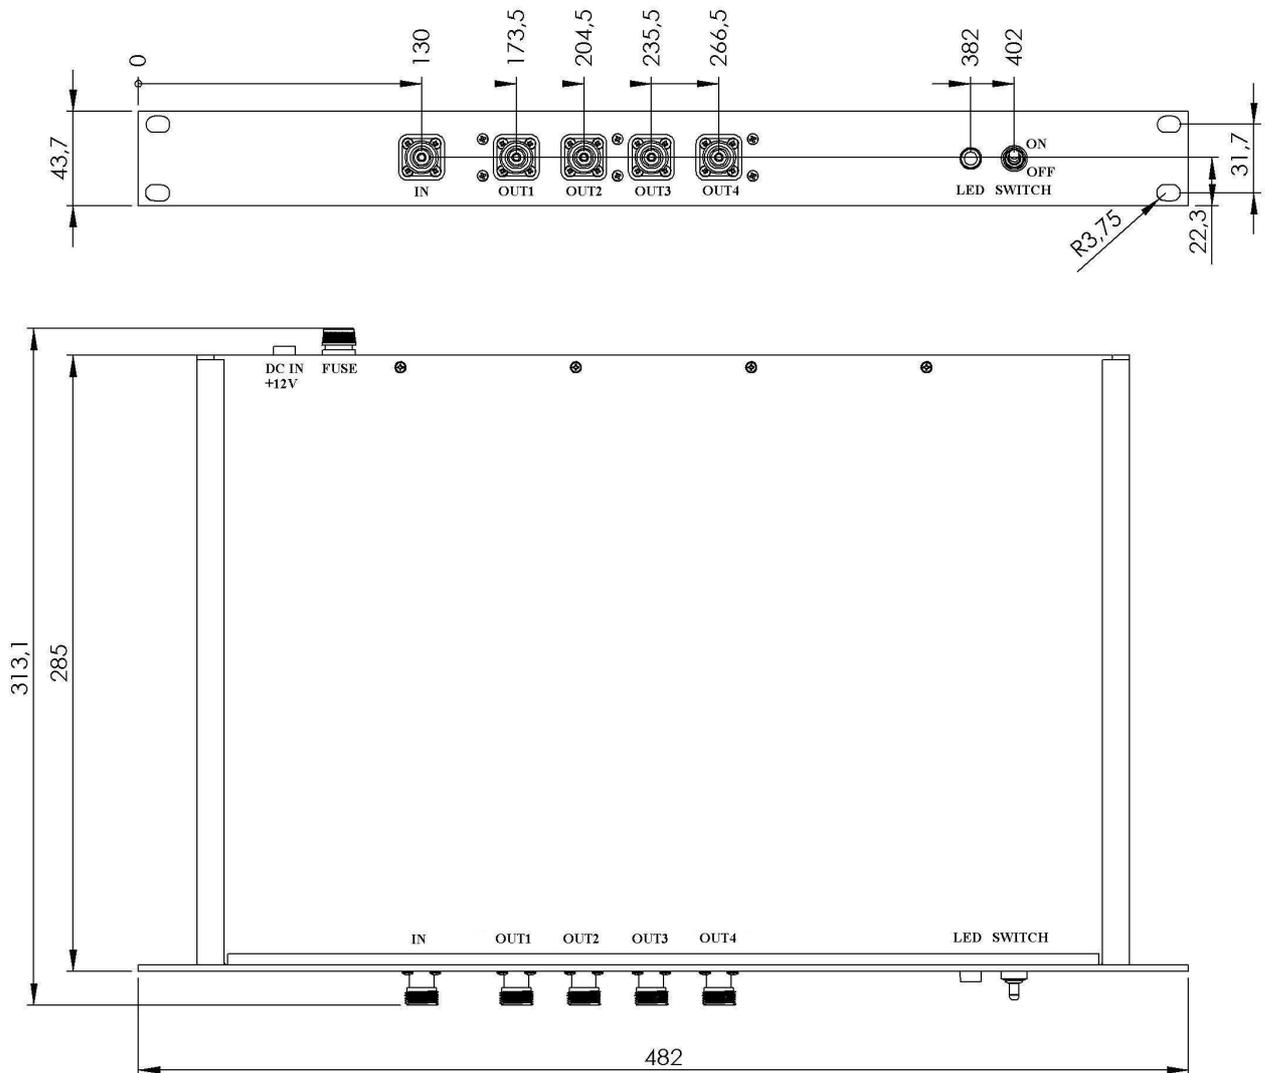

Rantelon reserves the right to change the specification without notice.