

## 791.25MHz Band-Pass Filter

FB-791.25M is band pass filter with very high stop-band rejection ratio. FB-791.25M low insertion loss and high attenuation in stop band provides for possibility of very flexible design of CATV-networks.

### Technical specifications:

Parameter	Specification	Unit
Center frequency	791.25	MHz
Insertion loss at center frequency	<6	dB
Bandwidth 0.5dB	34	MHz
Bandwidth 40dB	130	MHz
Attenuation in stop-band	>50 typ.	dB
Return loss:	>12	dB
Impedance	75	$\Omega$
Connector type		
	Port 1	F-female
	Port 2	F-male
Dimensions	94x21x21	mm



Figure 1: FB-791.25M.

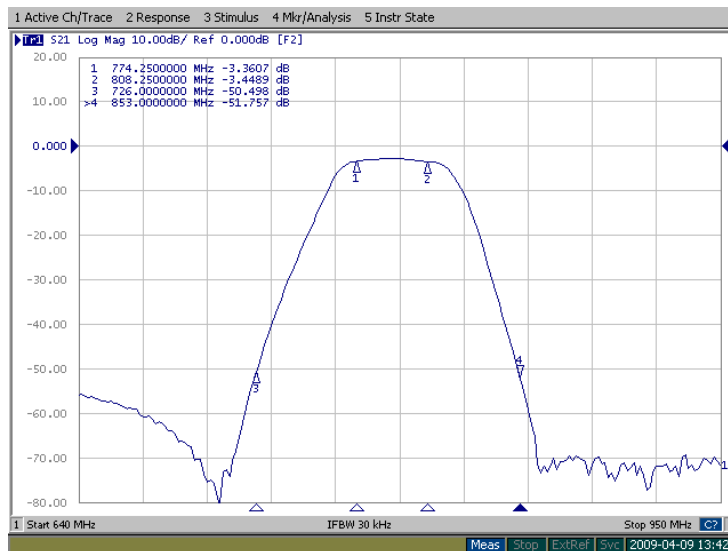


Figure 2: FB-791.25M transfer function in 640-950MHz band.

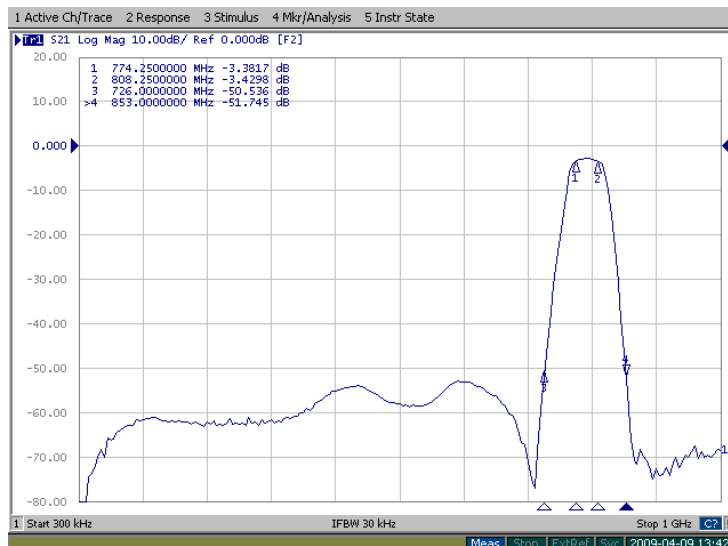


Figure 3: FB-791.25M transfer function 300kHz-1GHz band.